



深圳市国冶星光电子有限公司
SHENZHEN GUOYEXING OPTOELECTRONICS CO.,LTD.

承 认 书

SPECIFICATION FOR APPROVAL

客户名称Customer: _____

客户型号Customer Model: _____

产品型号Model: GYXM-G2357ASR-/半C

企业号No.: GYX-G-003

客户号Customer No: S0427

日期Date: 2007-06-29

附产品规格书Enclosure is the specification

深圳市国冶星光电子有限公司
SHENZHEN GUOYEXING OPTOELECTRONICS CO.,LTD.

生产部 Production Dept.	质量部 Quality Dept.	工程部 Engineering Dept.	市场部 Marketing Dept.
张述花	陈春莲	廖晶晶	韩丽娟

客户确认签名
APPROVED SIGNATURES

--	--	--	--

地址: 深圳市蛇口后海大道东角头工业区C座4楼 518067

Add: 4/F, Block C, Dongjiaotou Industrial Zone, Houhai Avenue, Shekou, Shenzhen.

电话Tel: 0086-755-26816353, 26816352

传真Fax: 0086-755-26686042



Email: gyx@gyx-led.com

Website: www.Gyx-led.com




GYXM-G2357ASR-1/半C

PACKAGE DIMENSIONS

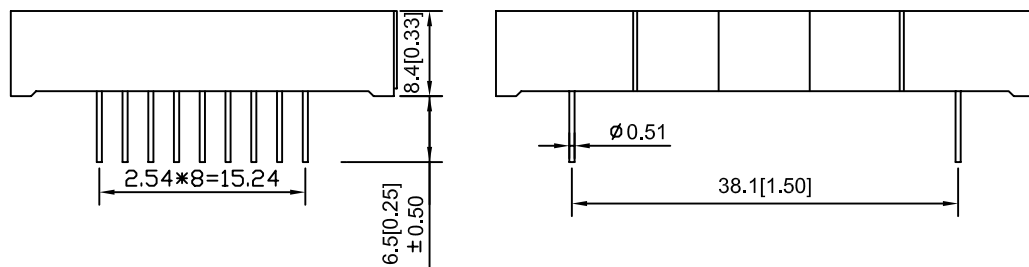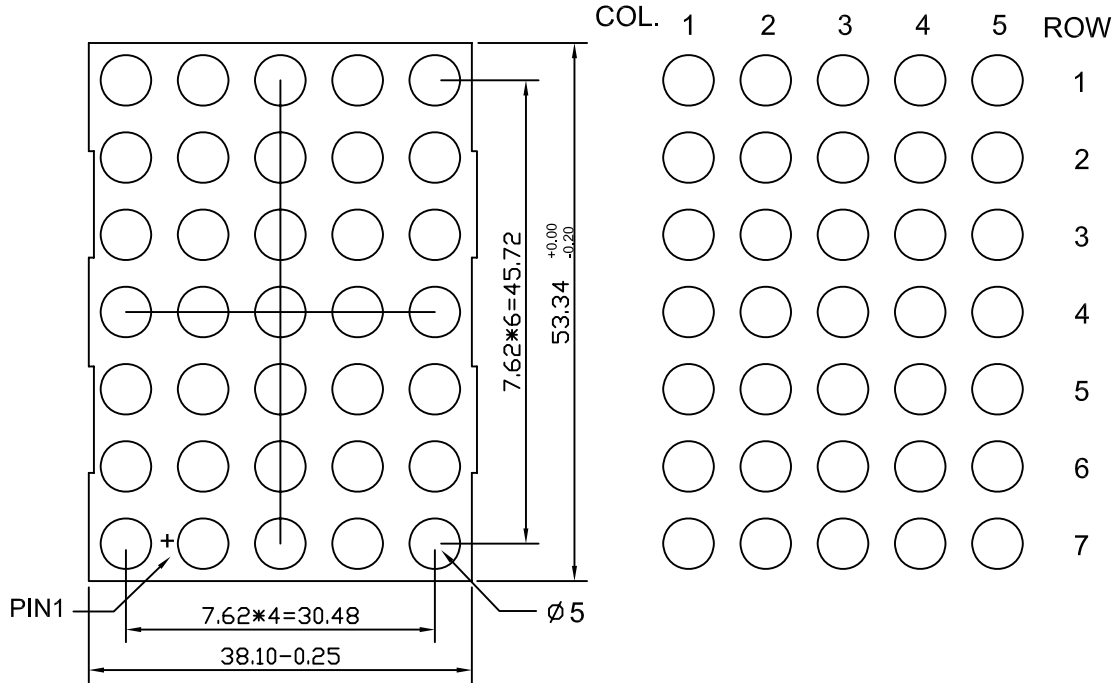

INTERNAL CIRCUIT DIAGRAM

9 NO PIN

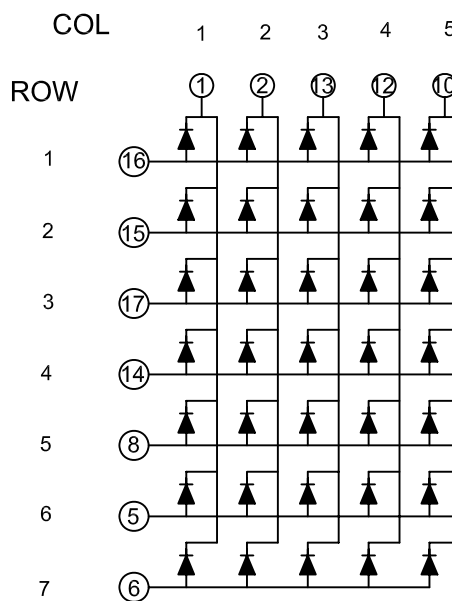

→ GREEN

NOTES:

1. All Dimensions are in millimeters.
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted



GENERAL INFORMATION

Part NO.	Chip Material	Emitting Color	Lens Type	Description
GYXM-G2357ASR-/半C	GaAlAs/GaAs	RED	translucence	common Anode

Electrical/Optical Characteristics at Ta=25°C

Parameter	Symbol	Typ.	Max.	Unit	Conditions
Luminous Intensity	Iv	11	12	mcd	IF=20mA
Peak Wavelength	λ_P	—	—	nm	IF=20mA
		—	—		
Dominant Wavelength	λ_D	640	645	nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$	—	—	nm	IF=20mA
		—	—		
Forward Voltage	VF	1.80	1.85	V	IF=20mA
Reverse Current	IR		50	uA	VR=5V

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	Pd	65	mW
		75	
Forward Current	IF	20	mA
Peak Forward Current(1)	IF(Peak)	120	mA
		120	
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-40° c+80° c	
Storage Temperature	Tstg	-40° c+80° c	
Lead Solder Temperature(2)	Tsol	260° c for 5 seconds	

Notes:

- 1/10 duty cycle, 0.1ms pulse width.
- 2mm below package base.