


项目(Item)	符号(Symbol)	最小值(Min)	典型值(Type)	最大值(Max)	单位(Unit)	测定条件(Condition)
正向电压(Forward Voltage)	Vf		6.6	80	V	If=15mA
正向电流(Forward Current)	If		15		mA	If=15mA
反向电流(Reverse Current)	Ir	-	-	0.01	mA	Vr=12V
峰值波长(Peak wavelength)	λ peak				nm	
均匀性(Luminous Uniformity)	Δ Lv	80			%	If=15mA
*亮度(Luminance)	Lv	2200	2400		cd/m ²	If=15mA
色坐标(Color Chromaticity)	X	0.29		0.34		If=15mA
	X	0.29		0.34		

项目(Item)	符号(Symbol)	值(Rating)
工作温度 Operating Temperature Range	Topr	-25° C to +75° C
储存温度 Storage Temperature Range	Tstg	-30° C to +80° C

Outline Dimensions(Unit: mm Unmarked Tolerance: ±0.20)

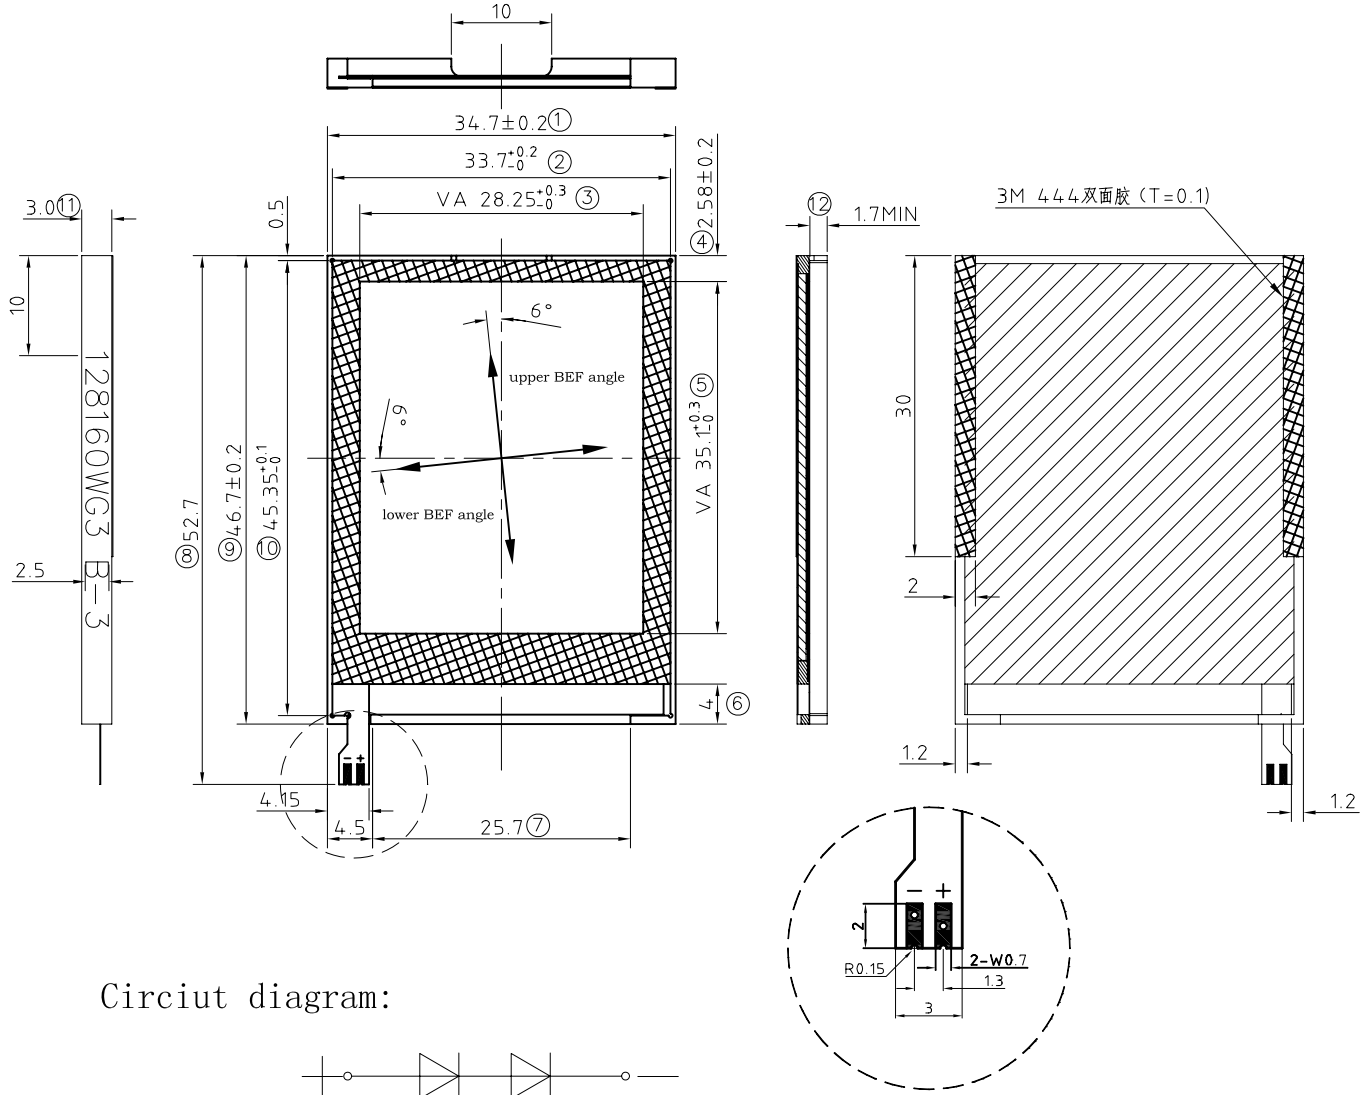

			TYPE	CUSTOMER P/N		
			GC0016W-7A			
Revise records	Name	Date	DRAWING		SCALE	VERSION
Design						A01
Check						
Process						共 页
Confirm					.GC0016-3.01A	SHENZHEN GUOYEXING OPTOELECTRONICS